

ReSet Call Point (RS1) Series 01, 02, 03, 04 & 11

'ReSet' is a unique fire alarm manual call point that mimics the feel of breaking glass whilst offering the user the benefits and safety advantages of a glass-free resettable operating element. Once activated a warning flag drops in to view easily identifying the call point that has been operated. A key can then reset the unit. The 'ReSet' provides an ideal solution for most conventional fire alarm systems. It is ideal for industries that are sensitive to broken glass as well as areas that suffer from a high number of false activations such as schools, shopping centres and other public places.

RESET CALL POINT SURFACE MOUNTING BACK BOX

COVER

OPERATING ELEMENT

RESET KEY (1) PROVIDED

SCREW 3.5 X 35 (2) PROVIDED

DiA. A

BACK BOX

COVER

**\*\*IMPORTANT NOTICE\*\***

For security reasons the ReSet call point is deliberately difficult to remove from the back box once fitted. Please ensure that the ReSet call point is installed correctly before snapping closed. Carefully attach the ReSet call point to the top of the back box. Hinge down to snap securely into place. (As illustrated Dia. A).

FLUSH MOUNTING

STANDARD FLUSH MOUNTING ELECTRICAL BOX

WALL PLATE

COVER

OPERATING ELEMENT

RESET KEY (1) PROVIDED

SCREW 3.5 X 35 (2) PROVIDED

DiA. B

COVER

WALL PLATE

**NB:** Carefully attach the ReSet call point to the top of the wall plate and hinge down to snap securely into place. (As illustrated Dia. B.)

DiA. C

2

1

**Detaching the lid from the wall plate or back box**

1. Insert key into the bottom of the ReSet lid.

2. Keep the key inserted and with your hand pull the lid towards you. (As illustrated Dia. C)

LPCB

EN54-11

Cert. No. 6532/02

Series 01 ONLY

Connection Options for ReSet Call Point Series 01

ReSet Series 01 Configuration

Option 1 terminals 1 & 4  
Normally open switch closing on alarm

Option 2 terminals 1 & 2  
Normally open switch closing on alarm with a 470 ohm resistor fitted inseries with the switch

Option 3 terminals 1 & 3  
Normally open switch closing on alarm with a 680 ohm resistor fitted inseries with the switch

Need help? Call our Technical Support Team on Freephone 0800 085 1678 (UK) Tel: 44 (0)1527 520999 (UK & Europe)

ReSet Call Point (RS1) Series 01, 02, 03, 04 & 11

'ReSet' is a unique fire alarm manual call point that mimics the feel of breaking glass whilst offering the user the benefits and safety advantages of a glass-free resettable operating element. Once activated a warning flag drops in to view easily identifying the call point that has been operated. A key can then reset the unit. The 'ReSet' provides an ideal solution for most conventional fire alarm systems. It is ideal for industries that are sensitive to broken glass as well as areas that suffer from a high number of false activations such as schools, shopping centres and other public places.

RESET CALL POINT SURFACE MOUNTING BACK BOX

COVER

OPERATING ELEMENT

RESET KEY (1) PROVIDED

SCREW 3.5 X 35 (2) PROVIDED

DiA. A

BACK BOX

COVER

**\*\*IMPORTANT NOTICE\*\***

For security reasons the ReSet call point is deliberately difficult to remove from the back box once fitted. Please ensure that the ReSet call point is installed correctly before snapping closed. Carefully attach the ReSet call point to the top of the back box. Hinge down to snap securely into place. (As illustrated Dia. A).

FLUSH MOUNTING

STANDARD FLUSH MOUNTING ELECTRICAL BOX

WALL PLATE

COVER

OPERATING ELEMENT

RESET KEY (1) PROVIDED

SCREW 3.5 X 35 (2) PROVIDED

DiA. B

COVER

WALL PLATE

**NB:** Carefully attach the ReSet call point to the top of the wall plate and hinge down to snap securely into place. (As illustrated Dia. B.)

DiA. C

2

1

**Detaching the lid from the wall plate or back box**

1. Insert key into the bottom of the ReSet lid.

2. Keep the key inserted and with your hand pull the lid towards you. (As illustrated Dia. C)

LPCB

EN54-11

Cert. No. 6532/02

Series 01 ONLY

Connection Options for ReSet Call Point Series 01

ReSet Series 01 Configuration

Option 1 terminals 1 & 4  
Normally open switch closing on alarm

Option 2 terminals 1 & 2  
Normally open switch closing on alarm with a 470 ohm resistor fitted inseries with the switch


Option 3 terminals 1 & 3  
Normally open switch closing on alarm with a 680 ohm resistor fitted inseries with the switch

Need help? Call our Technical Support Team on Freephone 0800 085 1678 (UK) Tel: 44 (0)1527 520999 (UK & Europe)

Technical Data for Reset Call Point (RS1) Series 01, 02, 03, 04 & 11


Reset Series (RS1) 01, 02, 03, 04 & 11

Series 01

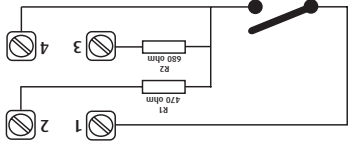


Denotes a Reset call point that will interface with most conventional fire alarm systems. It is fitted with two internal resistors 470 and 680 ohm. These are easily accessed through the installer terminals as illustrated.

Series 02

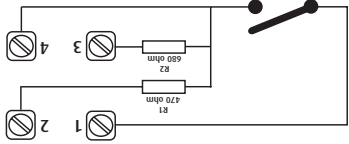


Denotes a Reset call point that is fitted with a single pole changeover switch both the normally open and normally closed contacts are easily accessed through the installer terminals as illustrated.

Series 03

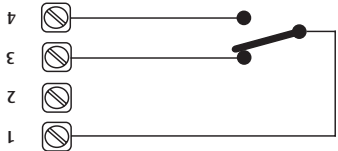


Denotes a Reset call point that is fitted with a double pole normally open switch easily accessed through the installer terminals as illustrated.

Series 04

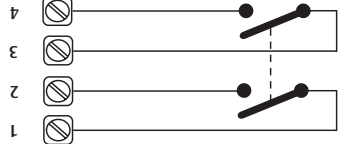

Denotes a Reset call point that is fitted with a double pole normally closed switch easily accessed through the installer terminals as illustrated.

Series 11

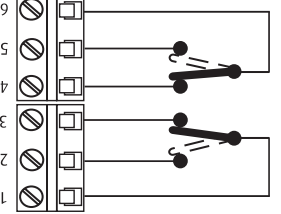

Denotes a Reset call point that incorporates two independent single pole changeover switches providing double pole changeover contacts. Easily accessed through installer terminals as illustrated.

Need help? Call our Technical Support Team on Freephone 0800 085 1678 (UK) Tel: 44 (0)1527 520999 (UK & Europe)

IPRRes-R51\_SerieS01-04&11 - Revised 04/08-014 - Printed in England

Reset Series (RS1) 01, 02, 03, 04 & 11

Specifications

Current Rating (All Series)	3 Amps 12 - 24V DC
Current Rating (Series 02-04 & 11)	3 Amps 125 - 250V AC
Low Current Rating* (All Series)	1 - 100 mA 5 - 12V DC
*Gold contacts are especially suitable for low current and voltages.	
Housing and Mounting Box Material	Polycarbonate
Electrical Contact Material	Silver plated brass
Operating Temperature	-20°C to +65°C
Installation Terminal Conductor Size	0.5mm - 2.5mm

Methods of Mounting


Flush installations

The Reset call point is provided with a wall plate that is designed to fit directly onto a standard UK single 35mm deep flush box.  
Secure the wall plate to the flush mount box with the screws provided. Carefully attach the Reset call point to the top of the wall plate and hinge down to snap securely into place.

Surface installations (RS1)

**NB: For security reasons the Reset call point is deliberately difficult to remove from the back box once fitted. Please ensure that the Reset call point is installed correctly before snapping closed.**  
The Reset call point can be supplied complete with its own surface mounting back box, 20mm entry holes can be easily cut using the template provided on each pack box. (See ill. 'B' below).  
With the screws provided, fix the back box to the wall. Carefully attach the Reset call point to the top of the back box, hinge down to snap securely into place.

Dimensions

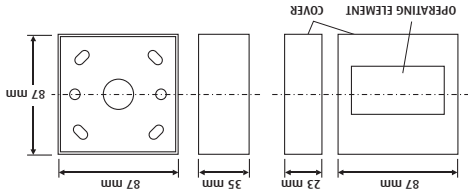


Need help? Call our Technical Support Team on Freephone 0800 085 1678 (UK) Tel: 44 (0)1527 520999 (UK & Europe)

IPRRes-R51\_SerieS01-04&11 - Revised 04/08-014 - Printed in England


Reset Series (RS1) 01, 02, 03, 04 & 11

Series 01

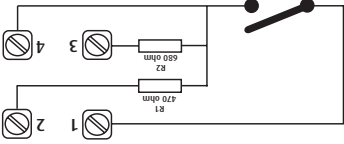


Denotes a Reset call point that will interface with most conventional fire alarm systems. It is fitted with two internal resistors 470 and 680 ohm. These are easily accessed through the installer terminals as illustrated.

Series 02

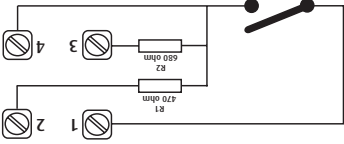


Denotes a Reset call point that is fitted with a single pole changeover switch both the normally open and normally closed contacts are easily accessed through the installer terminals as illustrated.

Series 03

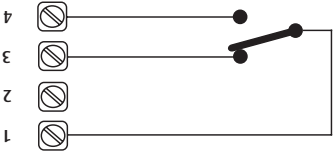


Denotes a Reset call point that is fitted with a double pole normally open switch easily accessed through the installer terminals as illustrated.

Series 04

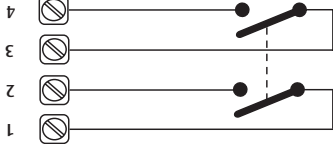

Denotes a Reset call point that is fitted with a double pole normally closed switch easily accessed through the installer terminals as illustrated.

Series 11

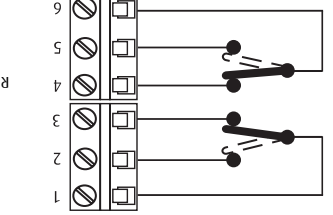

Denotes a Reset call point that incorporates two independent single pole changeover switches providing double pole changeover contacts. Easily accessed through installer terminals as illustrated.

Need help? Call our Technical Support Team on Freephone 0800 085 1678 (UK) Tel: 44 (0)1527 520999 (UK & Europe)

IPRRes-R51\_SerieS01-04&11 - Revised 04/08-014 - Printed in England

Technical Data for Reset Call Point (RS1) Series 01, 02, 03, 04 & 11

Reset Series (RS1) 01, 02, 03, 04 & 11

Specifications

Current Rating (All Series)	3 Amps 12 - 24V DC
Current Rating (Series 02-04 & 11)	3 Amps 125 - 250V AC
Low Current Rating* (All Series)	1 - 100 mA 5 - 12V DC
*Gold contacts are especially suitable for low current and voltages.	
Housing and Mounting Box Material	Polycarbonate
Electrical Contact Material	Silver plated brass
Operating Temperature	-20°C to +65°C
Installation Terminal Conductor Size	0.5mm - 2.5mm

Methods of Mounting


Flush installations

The Reset call point is provided with a wall plate that is designed to fit directly onto a standard UK single 35mm deep flush box.  
Secure the wall plate to the flush mount box with the screws provided. Carefully attach the Reset call point to the top of the wall plate and hinge down to snap securely into place.

Surface installations (RS1)

**NB: For security reasons the Reset call point is deliberately difficult to remove from the back box once fitted. Please ensure that the Reset call point is installed correctly before snapping closed.**  
The Reset call point can be supplied complete with its own surface mounting back box, 20mm entry holes can be easily cut using the template provided on each pack box. (See ill. 'B' below).  
With the screws provided, fix the back box to the wall. Carefully attach the Reset call point to the top of the back box, hinge down to snap securely into place.

Dimensions

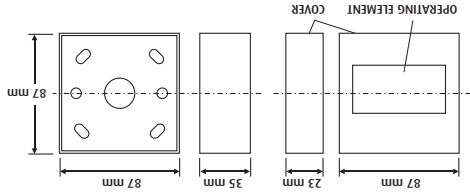

Need help? Call our Technical Support Team on Freephone 0800 085 1678 (UK) Tel: 44 (0)1527 520999 (UK & Europe)

IPRRes-R51\_SerieS01-04&11 - Revised 04/08-014 - Printed in England