



Type A Outdoor Manual Call Point **EV-MCP2-IP67**

Part no. F16-82206

General Description

EV-MCP2-IP67 is a Type A Outdoor Manual Call Point, compatible with Evolution analogue addressable system devices.

The Manual Call Point comprises a Non Frangible, Resettable, operating face with an LED provided to Indicate Alarm active condition.

The device is provided with a waterproof Backbox with knock-outs and M20 threads for easy fitment of Cable glands.

The address may be set using DIL switch on the Device.

Approvals

| | |
|------------------|--------------------------|
| Test Standards | EN54-11: 2001 + A1: 2005 |
| CPR Certificate | 2531-CPR-232.1690 |
| UKCA Certificate | 8504-UKCA-CPR-UKCSP10002 |
| DoP Number | 1690 |


Data

| | |
|------------------------|-----------------------------|
| Manual Call Point Type | Type A Outdoor |
| Operating Method | Non Frangible, Resettable |
| Operating Element | Microswitch |
| Operating loop voltage | 20 to 35 Vdc |
| Quiescent current | 200 μ A |
| Alarm current | 2 mA (LED On) |
| Operating temperature | -25°C to +70°C |
| Storage temperature | -25°C to +70°C |
| Relative humidity | < RH 95% (Non-condensing) |
| Cable terminals | 0.75 to 2.5 mm ² |
| Material | PC |
| Weight | 280 g |
| Dimensions | 88mm x 90mm x 72mm |
| I.P. Protection Rating | IP67 |

All wiring must conform to the current edition of IEE Wiring regulations and BS5839 Part 1

All loop Cable Screens shall be connected together, but must be Isolated from Ground. Cable Screens shall be connected to Earth Ground within the Control Panel ONLY.

Connections

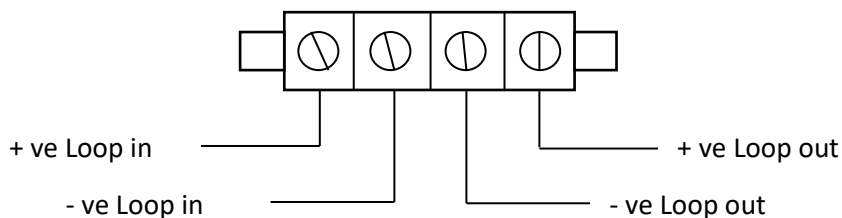

Dimensions mm

